


WC108W-HF

Shielded Composite 2 + 6 Cable 2 x 0.75 - Halogen free

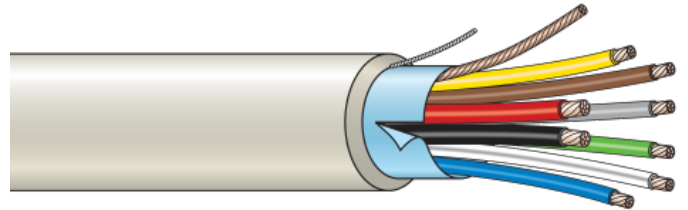

Standard Features

- For internal or external wiring of warning network systems
- Halogen free
- Suitable for gluing to surfaces
- High quality PVC

WC108W-HF

Shielded Composite 2 + 6 Cable 2 x 0.75 - Halogen free

Specifications

Shielding	
Shielded	Yes
Core	
Conductor size	0.22 mm ² (data) - 0.75 mm ² (power)
Conductor material	Plain copper
Wire colours	Red, Black (power) Blue, White, Yellow, Green, Grey, Brown (data)
Jacket	
Jacket colour	White
Jacket thickness	Min. 0.45 mm ² - max. 0.7 mm ²
Electrical Characteristics	
Current rating	1 A
Max. conductor DC resistance	92.4 ohm/km @ +20°C
Nominal (mutual) capacitance	90 pF/m
Physical	
Cable length	100 m
No. of wires	8
Environmental	
Halogen free	Yes
Standards & Regulation	
Compliancy	CE

Ordering Information

Part No.	Description
WC108W-HF	Shielded Composite 2 + 6 Cable 2 x 0.75 - Halogen free