

WCAT54-HF

4 Pairs, FTP LAN Cable, Category 5 Enhanced, box of 305 m - Halogen free

Halogen free cabling for transport of different types of information: LAN, traditional and digital telephony (ISDN), video images, alarms and controls.

Certification

In addition to a very high standard of workmanship needed to meet the latest international standards, which establish the rules for the wiring of commercial buildings, the connections in a network must guarantee the utmost flexibility and universality. They must be able to support the widest range of current and future protocols.

As a result, the transmission media must be specifically designed to meet these requirements. In this area, they have also taken on a very important role in gaining certification for these cables, from both SGS and independent laboratories, that is recognised at national and international levels.

Category 5 "enhanced" cable, tested up to 200 MHz


The idea of this new cable category, which has transmission tested up to 200 MHz, is that these cables can be used for high bit-rate data networks with greater flexibility and availability than ordinary Category 5 cables.

In addition, they are characterised by a level of immunity which permits good transmission in even the most severe AMC environments and which complies with all types of application with radiation limits.

When the ACR (Attenuation to Crosstalk Ratio) is insufficient, problems may arise due to high frequency EMC performances and insufficient return losses.

WCAT used with Advisor Master

When WCAT cable is used with the Advisor Master systems, the rules with respect to maximum length of the databus and the databus topology should be respected. See installation manuals for more details.

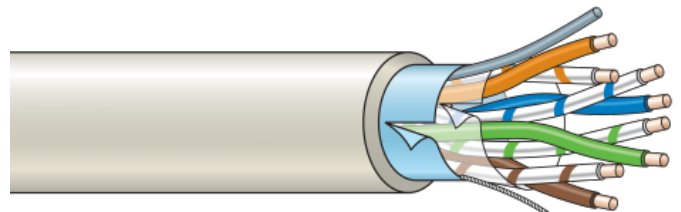

Standard Features

- 4 x 2 x AWG 24/1 FTP, category 5, enhanced, halogen free
- Recommended for: - Advisor Masters panels
- Networked fire panels and repeaters

WCAT54-HF

4 Pairs, FTP LAN Cable, Category 5 Enhanced, box of 305 m - Halogen free

Specifications

Shielding	
Shielded	Yes
Shield	1 tinned copper D.W.26/1 AWG + AL/PET tape
Insulation type	Solid
Core	
Conductor size	0.52 mm ²
Conductor material	Bare copper AWG 24/1
Wire colours	White-blue+blue, White-orange+orange, White-green+green, White-brown+brown
Jacket	
Jacket colour	Grey - RAL 7032
Jacket material	F.R. PVC
Electrical Characteristics	
Nominal velocity of propagation	74 %
Max. propagation delay	4.8 nsec/m
Max. propagation delay skew	0.13 nsec/m
Test voltage	700 VAC per 1 min
Max. rating voltage	125 V (not for power purposes)
Insulation resistance	2 Gohm/km
Max. conductor DC resistance	16.8 ohm/100 m @ +20°C
Nominal (mutual) capacitance	47 pF/m @ 1 kHz
Max. capacitance unbalanced	100 pF/100 m @ 1 kHz
Characteristic impedance	100 ±15 ohm
Structural return loss	25 db @ 20 MHz, 23 dB @ 100 MHz, 20 db @ 200 MHz
Physical	
Cable length	300 m
No. of wires	8
Min. bend radius	50 mm
Max. pull strength	20 kg
Outer dimensions	6.10 mm
Weight	42 kg/km
Environmental	
Halogen free	Yes
Heat release	637 MJ/km
Standards & Regulation	
Compliance	CE

Ordering Information

Part No.	Description
WCAT54-HF	4 Pairs, FTP LAN Cable, Category 5 Enhanced, box of 305 m - Halogen free